



Excavator - Diesel

Model : HME10

Australia-Wide Delivery with Low Freight Costs

Enjoy the convenience of nationwide delivery with our competitive freight rates.

Competitive Financing / Rent-to-Own Options Available

Take advantage of our attractive financing solutions tailored to meet your needs.

HANDYMAX

ABN: 78 643 556 030

2/22 Park Drive

Dandenong South VIC 3175

Phone: **03 9769 2888**

24/7: **1300 077 999**

sales@handymax.com.au

www.handymax.com.au

KEY FEATURES



Equipped with a Koop 192 engine delivering 10hp, ensuring efficient operation.

Maximum digging depth of 1580mm to meet diverse construction needs.

Capable of climbing slopes up to 30°, suitable for various terrains.

Left and right boom swing angles (50°/55°) provide increased flexibility and precision.

High operating pressure of 16 Mpa ensures powerful performance and reliability.

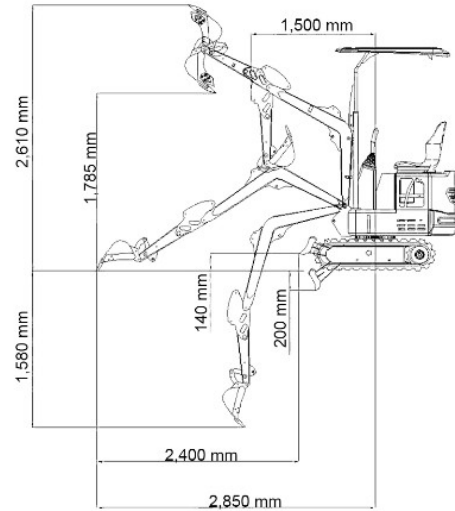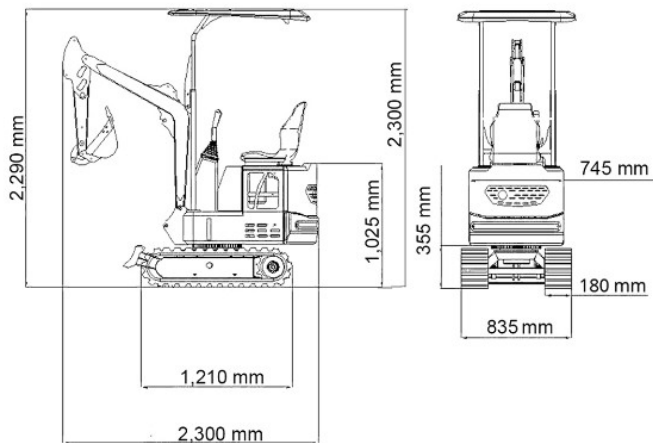

© HANDYMAX

*Please note there may be some differences between your actual machine and this illustration.

PRODUCT SPECIFICATIONS

OVERVIEW

Flow Rate	19.5 L/min
Swing Speed	11 rpm
Operating Pressure	16 Mpa
Max. Grade Ability	30°
Fuel Capacity	5 L
Travel Speed	1.3 km/h
Digging Force	7.8 kN

ENGINE

Engine Make	Koop
Engine Model	KD192FC
Engine Type	4-stroke, vertical, single-cylinder diesel engine
Engine Power	10hp / 7.6kw @ 3,000 rpm
Displacement	0.499 L
Max. Torque	25 N.m @ 2,860 rpm
Engine Oil	15W-40
Engine Oil Capacity	1.65 L
Cooling Type	Forced air-cooled system
Rotary Direction of Crankshaft	Clockwise from flywheel end
Engine Net Weight	50 kg

OPERATING RANGE

Max. Digging Radius On Ground	2,850 mm
Max. Digging Depth	1,580 mm
Max. Digging Height	2,610 mm
Max. Unloading Height	1,850 mm
Max. Vertical Digging Depth	1,340 mm
Min. Swing Radius	1,330 mm
Max. Lifting Height Of Dozer Blade	140 mm

Max. Digging Depth Of Dozer Blade	200 mm
DIMENSIONS	
Digging Bucket Capacity	0.02 m³
Wheelbase	835 mm
Total Length of Track	1,210 mm
Platform Ground Clearance	460 mm
Platform Back Turning Radius	660 mm
Chassis Width	800 mm
Track Width	180 mm
Track Height	320 mm
Transport Length	2,170 mm
Overall Height	2,295 mm
Left Boom Swing Angle	50 °
Right Boom Swing Angle	55 °
SERVICE REFILL CAPACITIES	
Engine Oil	15W-40
Engine Oil Capacity	1.65 L
Hydraulic Oil	ISO 46
Hydraulic Oil Change Interval	every 500 hours or earlier if the oil becomes contaminated
Air Filter	Part No.4678719

OPTIONAL ATTACHMENTS

	Hydraulic Hammer, Rock Breaker, X1 SKU: 7925559	\$1,650.00 Incl GST
	Trailer, HTL22 Trailer Model: LMPT2200 , ATM (Aggregate Trailer Mass): 2,200 kg , Maximum Load / Payload: 1,820 kg , Tare Mass: 380 kg , Tyre Size: 185R14 , Spare Wheel: Included , Braking System: ADR Approved Electric 4-Wheel Brake System – requires an in-vehicle brake controller. SKU: 6101972	\$8,019.00 Incl GST

10hp Koop Engine

1.0 T

Diesel



FREE Attachments



ABOUT HANDYMAX



Handymax Machinery is an Australian-owned and operated company dedicated to providing high-quality, cost-effective machinery solutions. Our diverse product range includes versatile wheel loaders, robust forklifts, and efficient excavators, all engineered for maximum efficiency and productivity across various industries.

We pride ourselves on innovation and reliability, ensuring each piece of equipment meets the highest standards. Our commitment to customer satisfaction is evident in our attentive service, extensive inventory, and competitive pricing. With our new, spacious headquarters at 2/22 Park Drive, Dandenong South, VIC 3175, we are better equipped than ever to serve our valued customers.

Trust Handymax Machinery to be your reliable partner for all your equipment needs, and join us in driving Australia's prosperity forward.

DISCLAIMER AND USAGE TERMS

Please note that there may be differences between the actual machine and the images or descriptions provided in this brochure. Handymax is committed to continuous improvement and reserves the right to make changes to the product at any time. This brochure is intended for descriptive purposes only. Specifications, dimensions, and illustrations are subject to change without notice. All performance and capacity specifications are based on engineering data and may vary slightly in actual applications. For the most up-to-date information, please contact our technical support team. Handymax endeavors to ensure all information in this brochure is accurate at the time of publication. However, if you find any inaccuracies or omissions, please contact us at marketing@handymax.com.au. Your feedback helps us improve our documentation and service.

All information contained within this document is protected by copyright and other intellectual property rights owned by Handymax and its licensors. No part of this material may be replicated, reproduced, or copied, either in its entirety or partially, without obtaining prior written consent from Handymax and its licensors. For further details, please contact us to request additional information.

Brochure Version: HME10.G2.59. Last Updated: 05 Nov 2025.