



Forklift - Diesel

Model : HMF25-D30

Australia-Wide Delivery with Low Freight Costs

Enjoy the convenience of nationwide delivery with our competitive freight rates.

Competitive Financing / Rent-to-Own Options Available

Take advantage of our attractive financing solutions tailored to meet your needs.

HANDYMAX

ABN: 78 643 556 030

2/22 Park Drive

Dandenong South VIC 3175

Phone: **03 9769 2888**

24/7: **1300 077 999**

sales@handymax.com.au

www.handymax.com.au

KEY FEATURES


55 Horse Power Diesel Engine with Automatic Transmission for powerful and easy operation.

3,000 mm Lift Height with 2-Stage Mast, provides great reach and efficient stacking.

Side-Shift feature for enhanced maneuverability and precise load placement.

Can be Registered and includes Dual Air Filter for improved air quality and compliance.

4th Joystick Installed and Fully Piped for additional control and functionality.

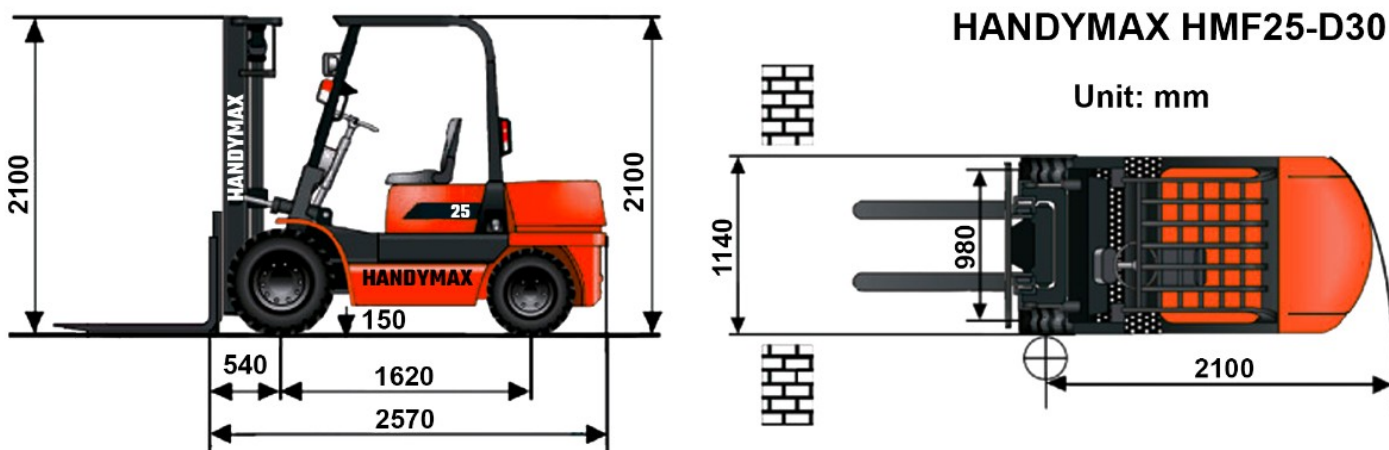

PRODUCT SPECIFICATIONS

OVERVIEW	
Load Centre	500 mm
Tyre Length	1,220 mm
Lift Height	3,000 mm
Lift Capacity	2,500 kg
Mast Type	2 Stage Mast
ITA Style	Class 2 (16" Carriage Height)
Side-shift Function	YES
Fork Positioner	Optional
ENGINE	
Engine Make	XINCHAI
Engine Model	C490BPG
Engine Power	55 hp
Rated Speed	2,650 rpm
Number of Cylinders	4
Cylinder Diameter	90 mm
Cooling System	Water Cooling
Fuel Type	Diesel
Engine Weight	260 kg
WEIGHTS	
Operating Weight	3,600 kg
SERVICE REFILL CAPACITIES	
Engine Oil	15W-40
Engine Oil Capacity	6.5 L
Hydraulic Oil	ISO 46
Hydraulic Oil Tank Capacity	50 L
Hydraulic Transmission Oil	10W-30
Hydraulic Transmission Oil Capacity	6 L

Brake Fluid	DOT 3
Brake Fluid Capacity	500 ml
Gear/Diff Oil	80W-90
Gear/Diff Oil Capacity	8 L
Coolant Type	Hybrid (HOAT)
Coolant Capacity	10-12 L
Fuel Tank Capacity	50 L
Engine Oil Filter	Part No.1210810
Fuel Filter / Diesel Filter	Part No.1200708
Air Filter	Part No.1220130
Air Filter (Top)	Part No.1228391
Transmission Oil Filter	Part No.1260807
Service Filter Set	Part No.7835616
TRANSMISSION	
Transmission Type	Automatic Powershift
Number of Speeds (Forward)	1
Number of Speeds (Reverse)	1
Drivetrain Type	Front-Wheel Drive (FWD)
BRAKE SYSTEM	
Brake Type	Dry Brake
CABIN	
Seat Belt	YES
ROPS & FOPS	YES
Adjustable Seat	YES
DIMENSIONS	
Overall Length Without Tynes	2,570 mm
Overall Length with 1220mm Tynes	3,790 mm
Overall Width	1,140 mm
Overall Height	2, 100 mm
Wheel Base	1,620 mm
HYDRAULIC PUMP	
Hydraulic Pump Type	Gear Pump
Displacement	32 cc/rev
Rated Operating Pressure	20 mpa / 2,901 psi
Max. Operating Pressure	25 mpa / 3,626 psi
Rated Operating Speed	2,500 rmp
Min. Operating Speed	600 rpm
Max. Operating Speed	3,000 rpm
Volumetric Efficiency	≥ 92%
TYRES	
Tyre Type	Pneumatic
Front Tyre Size	7.00 - 12 NHS
Rear Tyre Size	6.00 - 9 NHS
Front Tyre Maximum Pressure	125 psi
Rear Tyre Maximum Pressure	125 psi
Solid Tyres	Optional

ABOUT HANDYMAX



Handymax Machinery is an Australian-owned and operated company dedicated to providing high-quality, cost-effective machinery solutions. Our diverse product range includes versatile wheel loaders, robust forklifts, and efficient excavators, all engineered for maximum efficiency and productivity across various industries.

We pride ourselves on innovation and reliability, ensuring each piece of equipment meets the highest standards. Our commitment to customer satisfaction is evident in our attentive service, extensive inventory, and competitive pricing. With our new, spacious headquarters at 2/22 Park Drive, Dandenong South, VIC 3175, we are better equipped than ever to serve our valued customers.

Trust Handymax Machinery to be your reliable partner for all your equipment needs, and join us in driving Australia's prosperity forward.

DISCLAIMER AND USAGE TERMS

Please note that there may be differences between the actual machine and the images or descriptions provided in this brochure. Handymax is committed to continuous improvement and reserves the right to make changes to the product at any time. This brochure is intended for descriptive purposes only. Specifications, dimensions, and illustrations are subject to change without notice. All performance and capacity specifications are based on engineering data and may vary slightly in actual applications. For the most up-to-date information, please contact our technical support team. Handymax endeavors to ensure all information in this brochure is accurate at the time of publication. However, if you find any inaccuracies or omissions, please contact us at marketing@handymax.com.au. Your feedback helps us improve our documentation and service.

© 2025 HANDYMAX

All information contained within this document is protected by copyright and other intellectual property rights owned by Handymax and its licensors. No part of this material may be replicated, reproduced, or copied, either in its entirety or partially, without obtaining prior written consent from Handymax and its licensors. For further details, please contact us to request additional information.

Brochure Version: HMF25-D30.F2.G1.2. Last Updated: 10 Jul 2025.